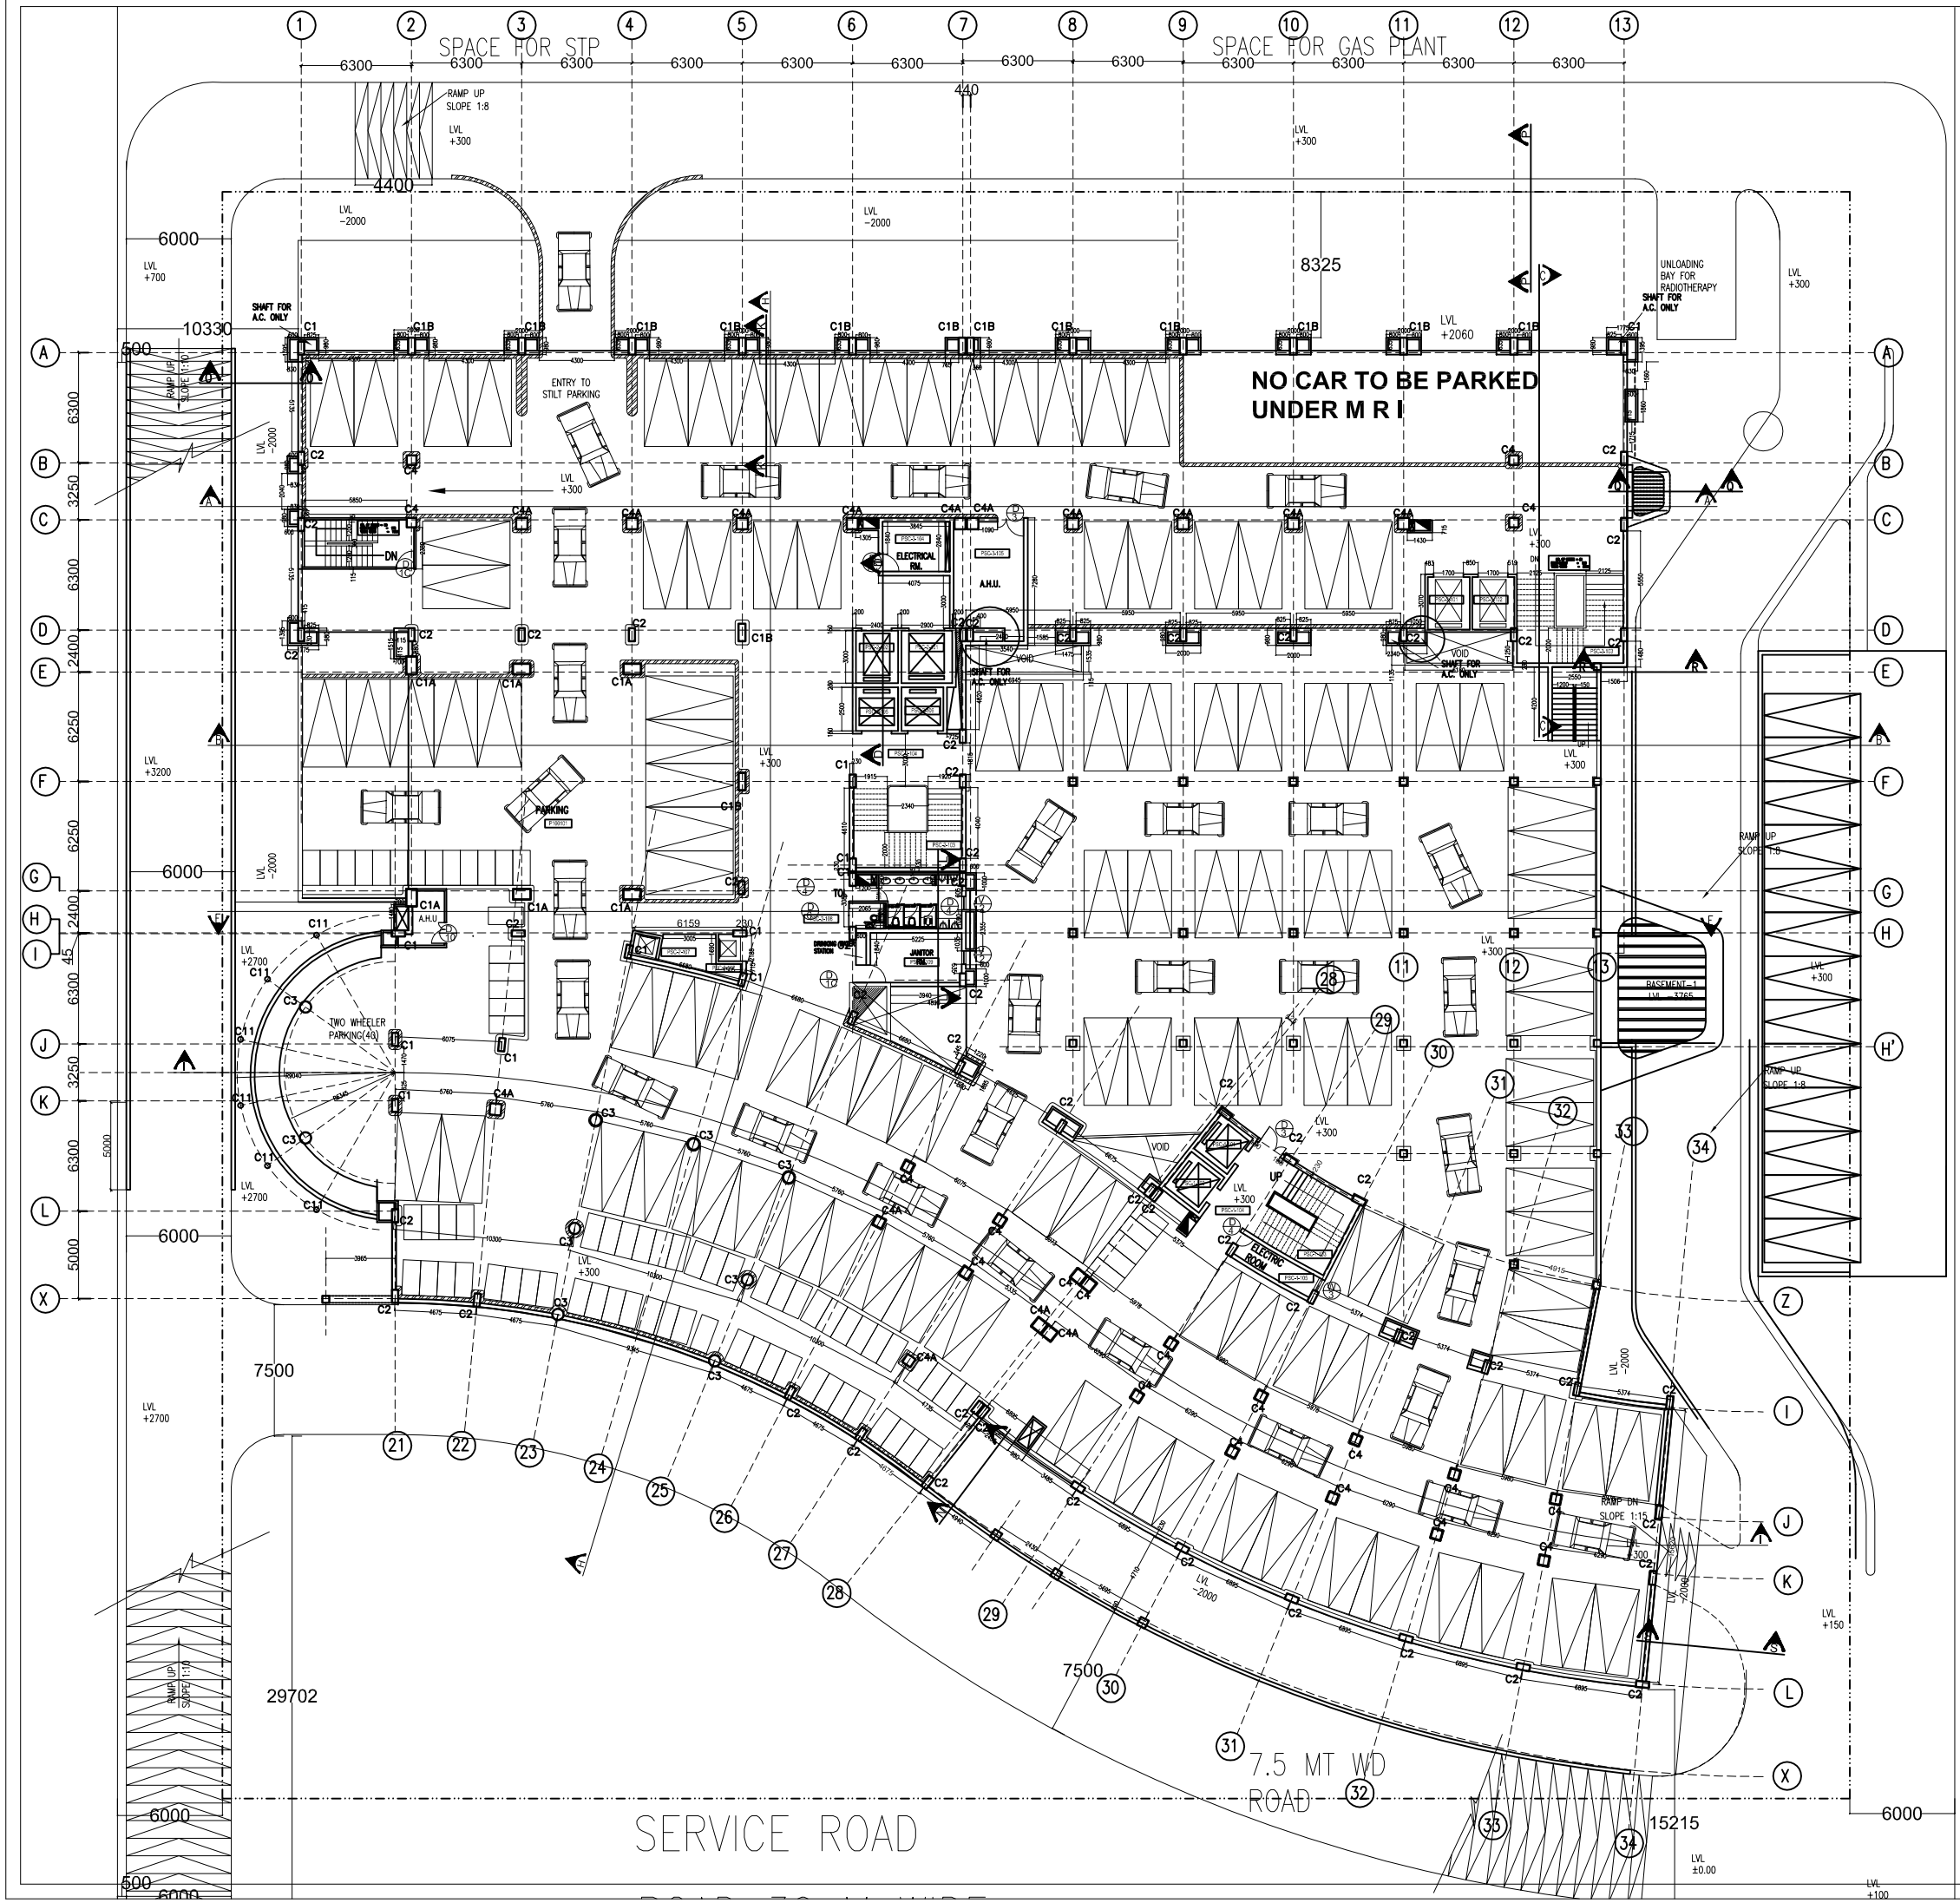

NOTES:

© THIS DRAWING IS THE PROPERTY OF M/S E F N RIBEIRO ASSOCIATES AND IS NOT TO BE USED FOR ANY PURPOSE OTHER THAN WHICH IT IS ISSUED.
© THIS DRAWING IS NOT TO BE REPRODUCED TRACED OR COPIED WITHOUT THE PRIOR PERMISSION OF THE ARCHITECT.
© ALL DIMENSIONS MUST BE VARIFIED AT THE SITE BEFORE COMENCEMENT OF WORK.
© ALL WRITTEN DIMENSIONS ARE TO BE FOLLOWED AND THE DRAWING IS NOT TO BE SCALED.
© ANY DISCREPANCIES FOUND IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECT IMMEDIATELY.
© THE SOLE COPYRIGHT FOR THIS PLAN LIES WITH E F N RIBEIRO ASSOCIATES. MISUSE OF THIS DRAWING OR COPYRIGHT INFRINGEMENT IS LIABLE FOR STRICT LEGAL ACTION.

FLOOR AREA = 4983 sq.m.

AREA CHART

TOTAL PLOT AREA	=	11338.0 SQ
PERMISSIBLE F.A.R. @	=150	17008..31 SQ.M.
PERMISSIBLE GROUND COVERAGE	=	5052 SQ.M.
PROPOSED GROUND FLOOR	=	3536 SQ.M.
PROPOSED FIRST FLOOR	=	3360 SQ.M.
PROPOSED SECOND FLOOR	=	3151 SQ.M.
PROPOSED THIRD FLOOR	=	2756 SQ.M.
PROPOSED FOURTH FLOOR	=	2652 SQ.M.
PROPOSED FIFTH FLOOR	=	2761 SQ.M.
PROPOSED STILT FLOOR	=	3536 SQ.M.
PROPOSED BASEMENT FLOOR	=	5350 SQ.M.
ACHIEVED F.A.R	=	150
PEMISSIBLE HEIGHT	=	24 M
PROPOSED HEIGHT	=	24 M

CAR PARKING

REQUIRED PARKING@1 ECS /100 SQ MT.	=	170
ACHIEVED PARKING		
PARKING AT STILTS LEVEL	=141.25 ECS	
BASEMENT PARKING	= 39.75 ECS	
TOTAL PARKING	= 181 ECS	

DOOR SCHEDULE

MKD.	SIZE.	SILL.	LINTEL.	NOS.	REMARKS
D1A	1000x2100	–	2100	0	ONE SHUTTER
D1B	1000x2100	–	2100	0	ONE SHUTTER
D1C	1000x2100	–	2100	2	ONE SHUTTER
D2	1800x2100	–	2100	0	TWO SHUTTER
D3	1500x2100	–	2100	3	TWO SHUTTER
D4	750x2100	–	2100	6	ONE SHUTTER TOILET DOOR
D5	2000x2700	–	2700	0	ON FLOOR SPRING
D6	900x2100	–	2100	1	TWO SHUTTER SLIDING HANDICAPPED DOOR
D7	2000x2100	–	2100	0	ON FLOOR SPRING
D8	2000x2100	–	2100	0	SLIDING O.T. DOOR
D9	1200x2100	–	2100	0	ONE SHUTTER
D10	1200x2100	–	2100	0	TWO SHUTTER

WINDOW SCHEDULE

W3	750x1500	1000	2500	1	TWO OPENABLE SHUTTER
V2	750x1200	1840	3040	2	BANJARA GLASS LOUVERED VENTILATOR

COLUMN SCHEDULE

MKD.	LENGTH	WIDTH	REMARK
C1A	1000	600	REF. STRUCTURE DWG
C1B	1000	400	
C1	750	350	
C2	750	350	
C3	650 DIAMETER		
C4	550	550	
C4A	650	650	
C10	400	400	
C11	325 DIAMETER		

PROJECT:

BLUE SAPPHIRE HOSPITAL

CONSULTANTS:

EFN RIBEIRO ASSOCIATES
22, GYAN KUNJ, LAXMI NAGAR
NEW DELHI- 110092

ARCHITECT:	OWNER:
SCALE:	DATE: 04-12-2008

DRG.NO: **AR/P - 02**

DRG.TITLE: **STILT PLAN**