



This drawing and the design it covers are property of FERNAS CONSTRUCTION INDIA PVT. LTD. They are merely loaned and on the borrower's express agreement that they will not be reproduced, copied, loaned, exhibited nor used except in the limited way and private use permitted by any written consent given by the lender to the borrower.

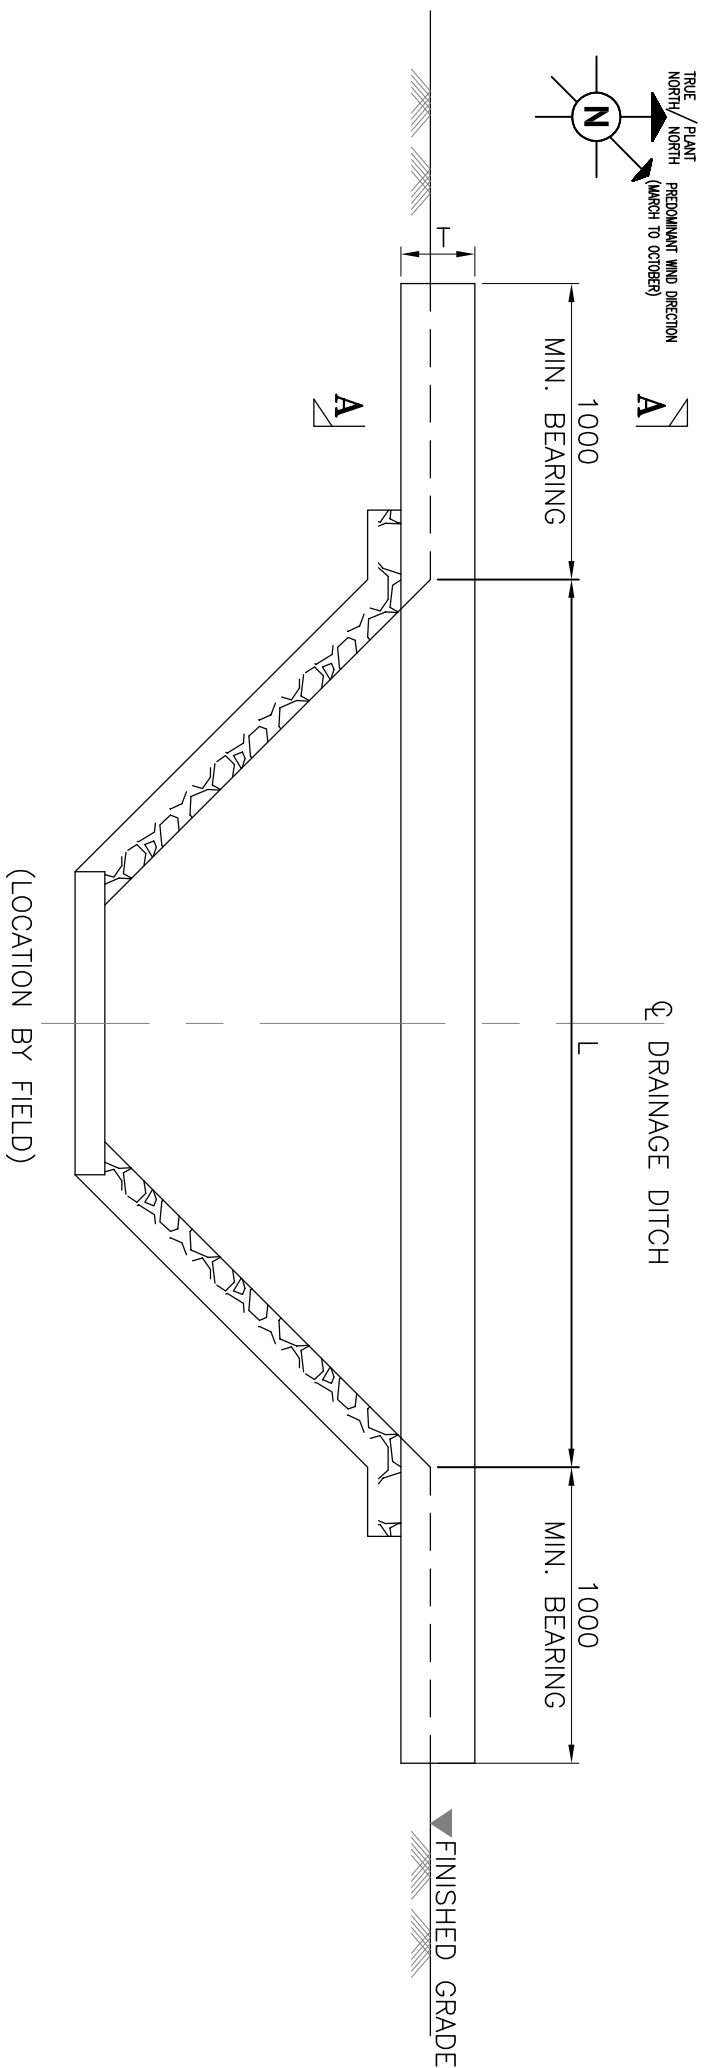

ELEVATION

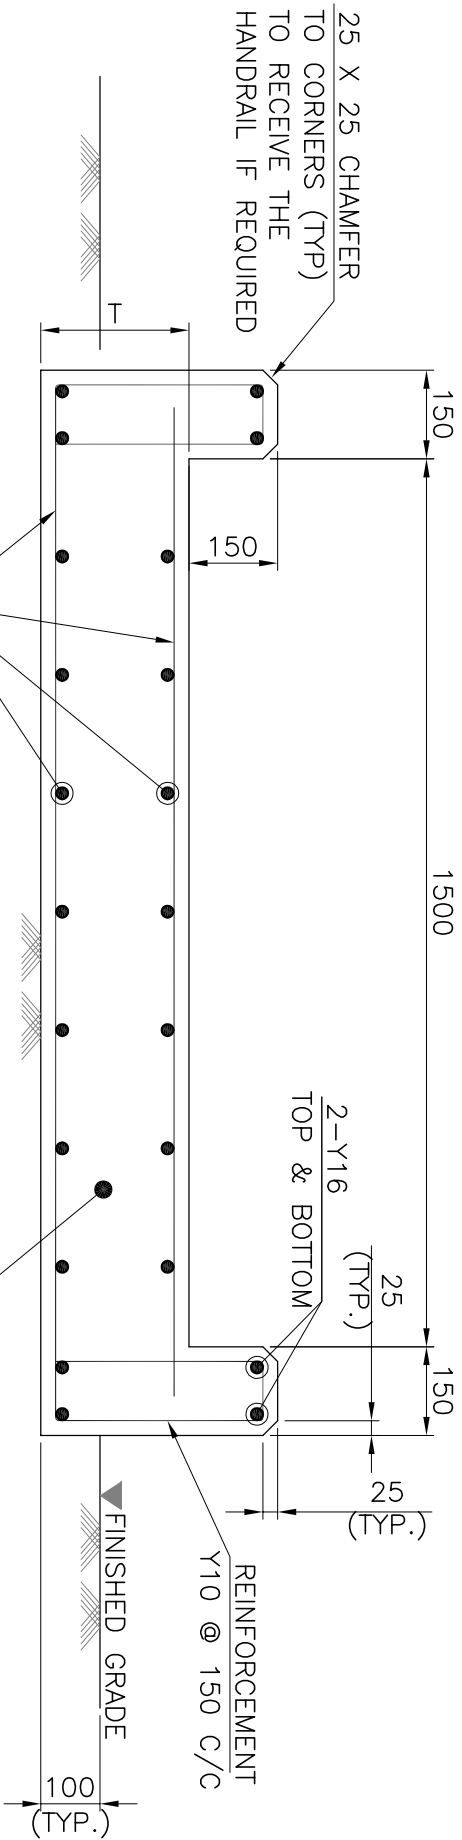

REINFORCEMENT REFER TABLE
(BOTH WAYS. TOP & BOTTOM)

SECTION A-A

Sr. NO	SPAN (DITCH WIDTH) (L)	SLAB THICKNESS (T mm)	DIA OF BAR & SPACING (mm)	REMARK
1.	4M.	200	Φ 16 @ 150 C/C	LESS THAN 4M DRAIN WIDTH MAX. BEARING 600
2.	6M.	300	Φ 20 @ 150 C/C	
3.	8M.	350	Φ 25 @ 150 C/C	

NOTES:-

1. ALL DIMENSIONS ARE IN MILLIMETER.
UNLESS NOTER OTHERWISE.
2. UNDERGROUND PIPING & OTHER CIVIL WORK
REFER SPECIFICATION 6-65-0035.
3. FOR LEGEND, ABBREVIATION & SYMBOLS
REFER STANDARD DWG. 7-65-0001.
4. RANDOM RUBBLE PITCHING REFER
SPEC. 6-65-1050.
5. ALL REINFORCEMENT SHOWN THUS Φ SHALL
BE OF COLD TWISTED DEFORMED BARS
CONFORMING TO IS:1788.
6. BAR BENDING SHALL CONFORM TO IS:2502

[illegible]