S.No.	PLUMBING LEGEND:-
1	SOIL PIPE
2	VENT PIPE
3	KITCHEN WASTE PIPE
4	WASTE PIPE
5	BALCONY RAIN WATER PIPE
6	RAIN WATER PIPE
7	RAIN WATER PIPE
8	DOMESTIC WATER SUPPLY(BOOSTER)(TOP THREE FLOORS)
9	DOMESTIC LOW ZONE WATER SUPPLY(DIR GRAVITY) GROUND TO 18TH FLOOR
10	DOMESTIC HIGH ZONE WATER SUPPLY(DIR GRAVITY) 19TH TO 37TH FLOOR
11	FLUSHING LOW ZONE WATER SUPPLY(DIR GRAVITY) GROUND TO 18TH FLOOR
12	FLUSHING HIGH ZONE WATER SUPPLY(DIR GRAVITY)(OVERFLOW) 0/M
13	FLUSHING HIGH ZONE WATER SUPPLY(DIR GRAVITY) 19TH TO 37TH FLOOR
14	FLUSHING WATER SUPPLY(DIR GRAVITY)(OVERFLOW) 0/M
15	FLUSHING WATER SUPPLY
16	DOMESTIC WATER SUPPLY RISER FOR O/H. TANK
17	FLUSHING WATER SUPPLY RISER FOR O/H. TANK
18	HVAC DRAIN PIPE

SN	FIRE FIGHTING PIPE LEGEND:-
A	HYDRANT PIPE ZONE-1
B	HYDRANT PIPE ZONE-2
C	HYDRANT PIPE ZONE-3
D	SPRINKLER PIPE ZONE-1
E	SPRINKLER PIPE ZONE-2
F	SPRINKLER PIPE ZONE-3
G	SPRINKLER STAND BY PIPE ZONE-1
H	SPRINKLER STAND BY PIPE ZONE-2
J	SPRINKLER STAND BY PIPE ZONE-3
K	DRAIN PIPE
FHC	FIRE HOSE CABINET

SCHEDULE OF DOORS + WINDOWS

SCHEDULE OF OPENINGS

TYPE	SIZE:	LOCATION	DESCRIPTION:	SILL HEIGHT FROM FFL	LINTEL HEIGHT FROM FFL
D	1800x2400	ENTLOBBY	AL. GLAZED DOOR	---	+2400
D	1100x2400	UNIT ENTRY	FIRE DOOR -1HR	---	+2400
D	900x2400	WALIT ROOM/SERVANT ROOM	FIRE DOOR -1HR	---	+2400
D1	900x2400	BED ROOM	WOODED DOOR	---	+2400
D1A	900x2400	KITCHEN	AL. GLAZED DOOR	---	+2400
D2	750x2400	TOILET	WOODED DOOR	---	+2400
D2'	900x2200	TMT	MOLDAL DOOR	+100	+2400
D2A	750x2400	TOILET	WOODED DOOR	---	+2400
D2A	750x2400	SERVANT ROOM	AL. GLAZED DOOR	---	+2400
D2A	750x2400	SERVANT ROOM	DC-FIRE/ACOUSTICS DOOR (SLIDING DOOR)	---	+2400
FD1	1800x2400	DC RM/PUMP RM ELEC RM/DWC RM	DC-FIRE/ACOUSTICS DOOR	---	+2400
FD2	1200x2200	ELECTRICAL SWITCH	MAIN-ELEC DOOR (WC-MEAL DOOR)	+100	+2400
FD3	1100x2400	REFUGE AREA	FIRE DOOR	---	+2400
FD4	1100x2400	STAIRCASE/LIFT LOBBY	FIRE DOOR	---	+2400
FD5	750x2200	ELECTRICAL/AV/TV/CMP SWITCH	FIRE DOOR	+100	+2400
FD6	500x2200	CMP	FIRE DOOR	+100	+2400
SD1	4200x2400	BED ROOM	AL. SLIDING DOOR	---	+2400
SD2	4275x2400	LIVING/DINING	AL. SLIDING DOOR	---	+2400
SD3	4225x2400	LIVING/DINING	AL. SLIDING DOOR	---	+2400
SD4	3850x2400	BED ROOM/LIVING/DINING	AL. SLIDING DOOR	---	+2400
SD5	3550x2400	LIVING/DINING	AL. SLIDING DOOR	---	+2400
SD6	3550x2400	LIVING/DINING/LOBBY	AL. SLIDING DOOR	---	+2400
SD7	3150x2400	BED ROOM	AL. SLIDING DOOR	---	+2400
SD8	3000x2400	BED ROOM	AL. SLIDING DOOR	---	+2400
SD9	2850x2400	BED ROOM	AL. SLIDING DOOR	---	+2400
SD10	2750x2400	BED ROOM	AL. SLIDING DOOR	---	+2400
SD11	2500x2400	BED ROOM	AL. SLIDING DOOR	---	+2400
SD12	2250x2400	BED ROOM	AL. SLIDING DOOR	---	+2400
SD13	1825x2400	BED ROOM	AL. SLIDING DOOR	---	+2400
SD14	1500x2400	MULTI ROOM	AL. SLIDING DOOR	---	+2400
DW1	750x2400	DOOR	DOOR CUM WINDOW	---	+2400
	900x1200	WINDOW	KITCHEN	+1200	+2400
W1	2940x1500	BED ROOM	AL. GLAZED WINDOW	+900	+2400
W2	1550x1200	KITCHEN	AL. GLAZED WINDOW	+1200	+2400
W3	1500x1800	LOBY	AL. GLAZED WINDOW	+900	+2400
W4	1500x1500	STAIRCASE	AL. GLAZED WINDOW	+900	+2400
W5	900x1500	BED ROOM	LOUVER/WINDOW	+900	+2400
W6	1100x1500	LOBBY	LOUVER/WINDOW	+900	+2400
W7	1500x1500	STAIRCASE	AL. GLAZED WINDOW	+900	+2400
W8	1500x1500	LOBY	AL. GLAZED WINDOW	+900	+2400
W9	1550x1200	KITCHEN	AL. GLAZED WINDOW	+1200	+2400
W10	1500x1500	BED ROOM	AL. GLAZED WINDOW	+900	+2400
V1	600x1200	TOILET	VENTILATOR	+1200	+2400
					(EXTS WRT FFL)

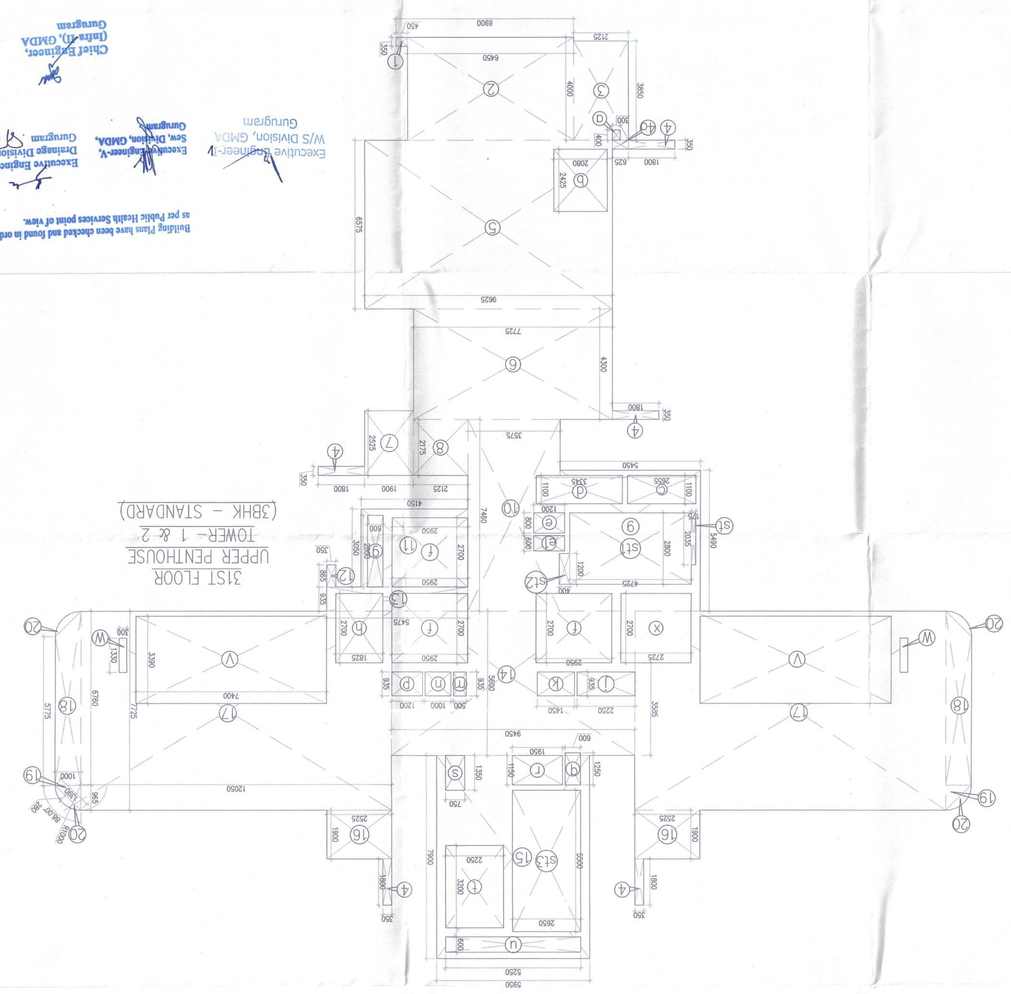

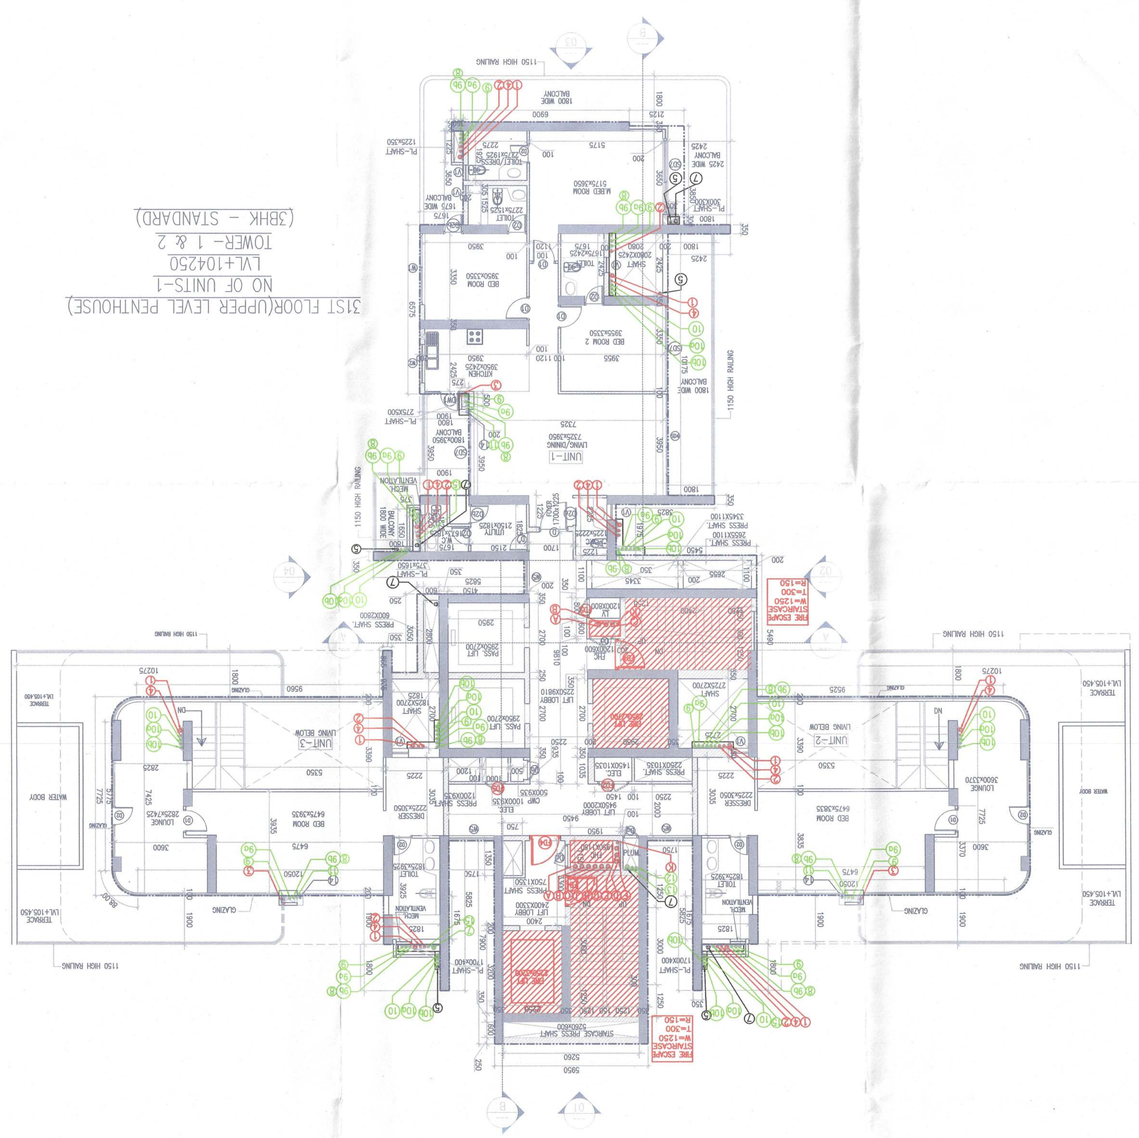

Building Plans have been checked and found in order as per Public Health Services point of view.

Executive Engineer-IV
W/S Division, GMDA
Gurugram

Executive Engineer-V
Sew. Division, GMDA,
Gurugram

Executive Engineer-III
Drainage Division, GMDA,
Gurugram

Chief Engineer,
Gmda, GMDA
Gurugram

GROSS - A											
1	=	1	X	0.450	X	0.350	=	0.158	SQM		
2	=	1	X	6.450	X	4.000	=	25.800	SQM		
3	=	1	X	2.125	X	3.850	=	8.181	SQM		
4	=	5	X	1.800	X	0.350	=	3.150	SQM		
4a	=	1	X	0.625	X	0.350	=	0.219	SQM		
5	=	1	X	9.625	X	6.575	=	63.284	SQM		
6	=	1	X	7.725	X	4.300	=	33.218	SQM		
7	=	1	X	1.900	X	2.525	=	4.798	SQM		
8	=	1	X	2.125	X	2.175	=	4.622	SQM		
9	=	1	X	5.450	X	5.490	=	29.921	SQM		
10	=	1	X	3.575	X	7.460	=	26.670	SQM		
11	=	1	X	4.150	X	3.050	=	12.658	SQM		
12	=	1	X	0.350	X	0.865	=	0.303	SQM		
13	=	1	X	5.475	X	0.935	=	5.118	SQM		
14	=	1	X	9.450	X	5.600	=	52.920	SQM		
15	=	1	X	5.950	X	7.900	=	47.005	SQM		
16	=	2	X	2.625	X	1.900	=	9.975	SQM		
17	=	2	X	12.050	X	7.725	=	186.173	SQM		
18	=	2	X	(5.775+6.750)	X	1.000	X	0.5	=	12.525	SQM
19	=	2	X	1.000	X	0.965	X	0.5	=	0.965	SQM
						TOTAL	=	627.291	SQM		
GROSS -C											
a	=	1	X	0.300	X	0.400	=	0.120	SQM		
b	=	1	X	2.080	X	2.425	=	5.044	SQM		
c	=	1	X	2.855	X	1.100	=	2.921	SQM		
d	=	1	X	3.245	X	1.100	=	3.680	SQM		
e	=	1	X	1.200	X	0.800	=	0.960	SQM		
e1	=	1	X	1.200	X	0.600	=	0.720	SQM		
f	=	3	X	2.950	X	2.700	=	23.895	SQM		
g	=	1	X	0.600	X	2.800	=	1.680	SQM		
h	=	1	X	1.825	X	2.700	=	4.928	SQM		
j	=	1	X	2.250	X	0.935	=	2.104	SQM		
k	=	1	X	1.450	X	0.935	=	1.356	SQM		
m	=	1	X	0.500	X	0.935	=	0.468	SQM		
n	=	1	X	1.000	X	0.935	=	0.935	SQM		
p	=	1	X	1.200	X	0.935	=	1.122	SQM		
q	=	1	X	0.600	X	1.250	=	0.750	SQM		
r	=	1	X	1.950	X	1.150	=	2.243	SQM		
s	=	1	X	0.750	X	1.350	=	1.013	SQM		
t	=	1	X	2.250	X	3.200	=	7.200	SQM		
u	=	1	X	5.250	X	0.600	=	3.150	SQM		
v	=	2	X	7.400	X	3.390	=	50.172	SQM		
w	=	2	X	0.300	X	1.330	=	0.798	SQM		
x	=	1	X	2.725	X	2.700	=	7.358	SQM		
						TOTAL	=	122.613	SQM		
GROSS -D											
b1	=	1	X	0.175	X	2.05	=	0.356	SQM		
b11	=	1	X	4.725	X	2.800	=	13.230	SQM		
b12	=	1	X	0.400	X	1.200	=	0.480	SQM		
b13	=	1	X	2.650	X	5.500	=	14.575	SQM		
						TOTAL	=	28.641	SQM		

FAR AREA OF 31ST FLOOR UPPER PENTHOUSE FLOOR													
						GROSS-A	+	GROSS-B	-	GROSS-C	-	GROSS-D
					=	627.291	+	1.069	-	122.613	-	28.641
						TOTAL	=	377.105	SQM	GROSS-F		
BULT-UP AREA OF 31ST FLOOR UPPER PENTHOUSE FLOOR												
					=	GROSS-F	+	GROSS-D				
						TOTAL	=	377.105	+	28.641		
										405.746	SQM	

ADDITIONAL																								
ARC AREA																								
GROSS - B																								
26	=	4	X	3.14	X	1.000	X	1.000	X	88.00	\	360	-	0.5	X	0.280	X	1.390	=	1.069	SQM			