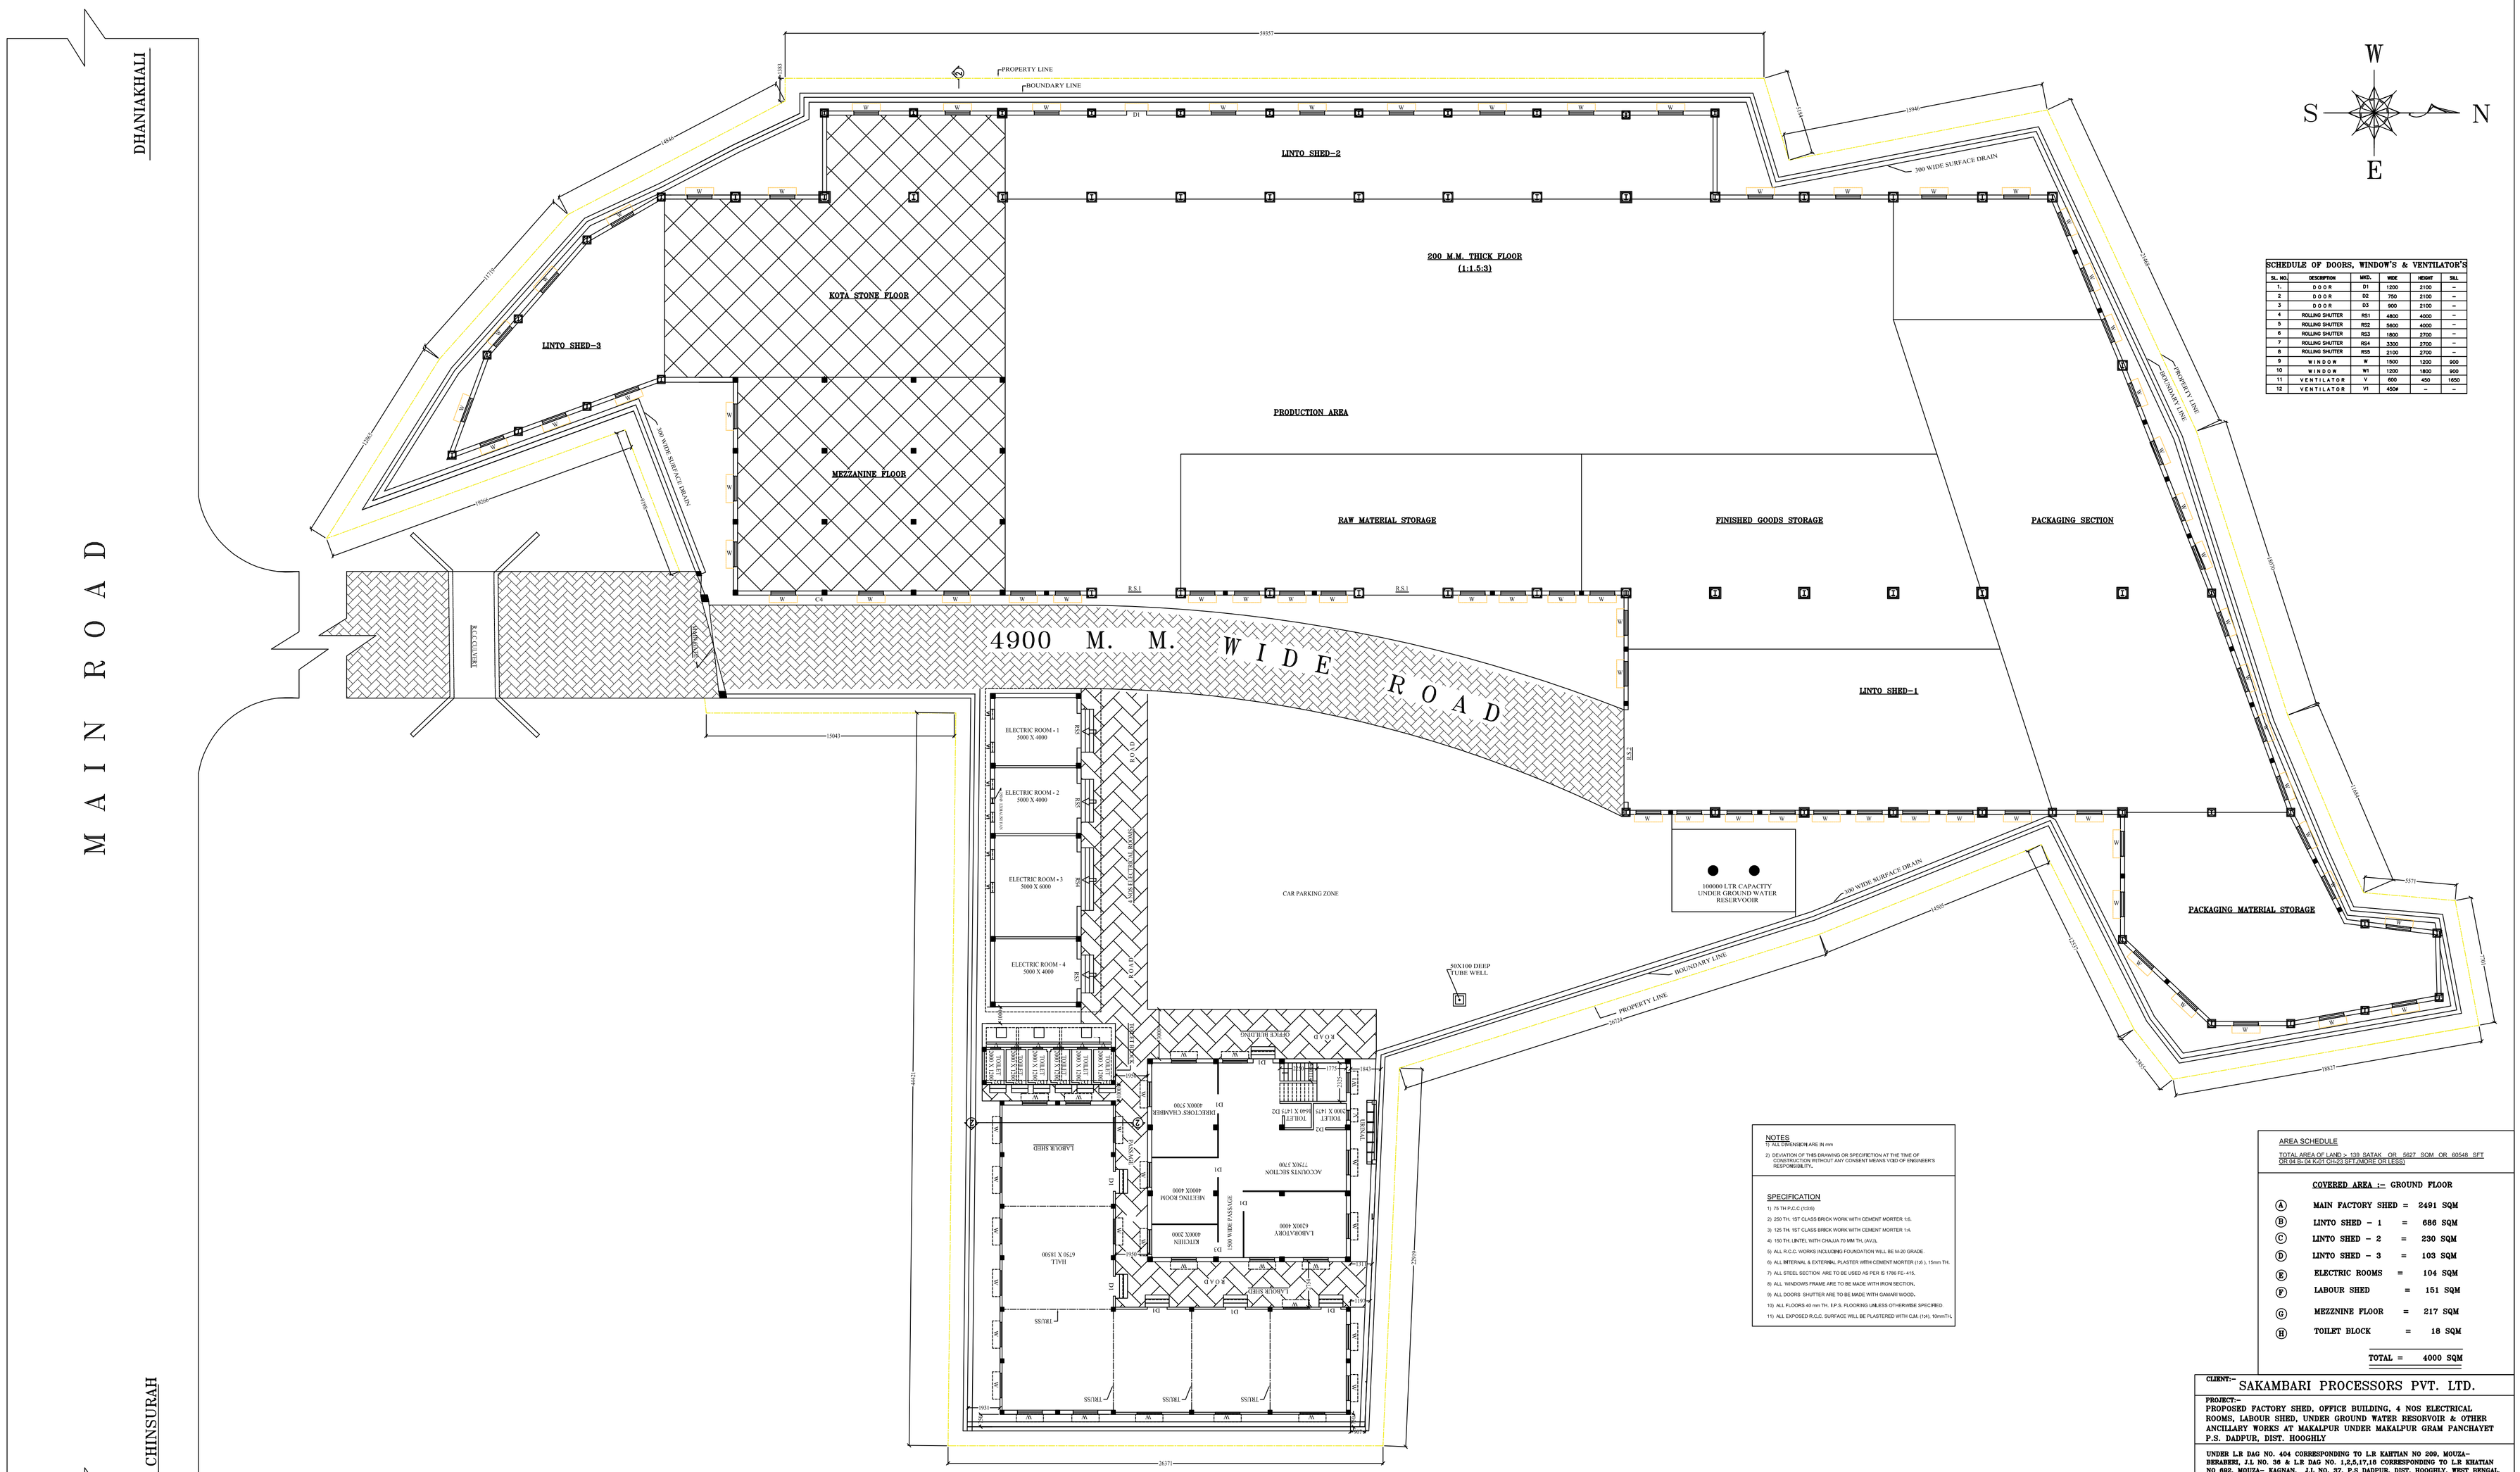

SCHEDULE OF DOORS, WINDOW'S & VENTILATOR'S					
SL. NO.	DESCRIPTION	MKD.	WIDE	HEIGHT	SILL
1.	D O O R	D1	1200	2100	–
2	D O O R	D2	750	2100	–
3	D O O R	D3	900	2100	–
4	ROLLING SHUTTER	RS1	4800	4000	–
5	ROLLING SHUTTER	RS2	5600	4000	–
6	ROLLING SHUTTER	RS3	1800	2700	–
7	ROLLING SHUTTER	RS4	3300	2700	–
8	ROLLING SHUTTER	RS5	2100	2700	–
9	W I N D O W	W	1500	1200	900
10	W I N D O W	W1	1200	1800	900
11	V E N T I L A T O R	V	600	450	1650
12	V E N T I L A T O R	V1	450#	–	–

NOTES

1) ALL DIMENSION ARE IN mm

2) DEVIATION OF THIS DRAWING ON SPECIFICTION AT THE TIME OF CONSTRUCTION WITHOUT ANY CONSENT MEANS VOID OF ENGINEER'S RESPONSIBILITY.

SPECIFICATION

1) 76 TH P.C.C.(1:5:8)

2) 250 TH. 1ST CLASS BRICK WORK WITH CEMENT MORTER 1:6.

3) 125 TH. 1ST CLASS BRICK WORK WITH CEMENT MORTER 1:4.

4) 150 TH. LINTEL WITH CHAJJA 70 MM TH. (1X1),

5) ALL R.C.C. WORKS (INCLUDING FOUNDATION WILL BE M-20 GRADE

6) ALL INTERNAL & EXTERNAL PLASTER WITH CEMENT MORTER (1:6), 15mm TH.

7) ALL STEEL SECTION ARE TO BE USED AS PER IS 1786 FE-415.

8) ALL WINDOWS FRAME ARE TO BE MADE WITH IRON SECTION.

9) ALL DOORS SHUTTER ARE TO BE MADE WITH GAMHAR WOOD.

10) ALL FLOORS 40 mm Th. E.P.S. FLOORING UNLESS OTHERWISE SPECIFIED.

11) ALL EXPOSED R.C.C. SURFACE WILL BE PLASTERED WITH C.M. (1:4), 10mmTH.

AREA SCHEDULE

TOTAL AREA OF LAND :- 139 SATAK OR 5637 SQM OR 60548 SFT
[0.34 Bi.,04 KGT (25CS) SFT (MORE OR LESS)]

COVERED AREA :- GROUND FLOOR

(A)	MAIN FACTORY SHED	=	2491 SQM
(B)	LINTO SHED - 1	=	686 SQM
(C)	LINTO SHED - 2	=	230 SQM
(D)	LINTO SHED - 3	=	103 SQM
(E)	ELECTRIC ROOMS	=	104 SQM
(F)	LABOUR SHED	=	151 SQM
(G)	MEZZNINE FLOOR	=	217 SQM
(H)	TOILET BLOCK	=	18 SQM
	TOTAL	=	4000 SQM

SIGN OF OWNER

CLIENT:-- SAKAMBARI PROCESSORS PVT. LTD.

PROJECT:--
PROPOSED FACTORY SHED, OFFICE BUILDING, 4 NOS ELECTRICAL ROOMS, LABOUR SHED, UNDER GROUND WATER RESORVOIR & OTHER ANCILLARY WORKS AT MAKALPUR UNDER MAKALPUR GRAM PANCHAYET P.S. DADPUR, DIST. HOOGHLY

UNDER L.R DAG NO. 404 CORRESPONDING TO L.R KAHTIAN NO 209, MOUZA:- BHABHEKI, J.L NO. 36 & L.R DAG NO. 1,2,5,17,18 CORRESPONDING TO L.R KHATIAN NO 692, MOUZA:- KAGNAN, J.L NO. 37, P.S DADPUR, DIST. HOOGHLY, WEST BENGAL.

SUBJECT :- PLAN OF FACTORY SHED, OFFICE BUILDING & OTHER ANCILLARY WORKS.

COMPUTER DRG NO.	SCALE	SIGNATURE OF ENGINEER
E:\A\AC\BS\EXCU\001 TI/DSR-SBJ/FP-01 21-09-2020	1 : 100, 25	
SHEET NO. 1 OF 1		